


fugip

Colored cementitious mortar
for grouting joints

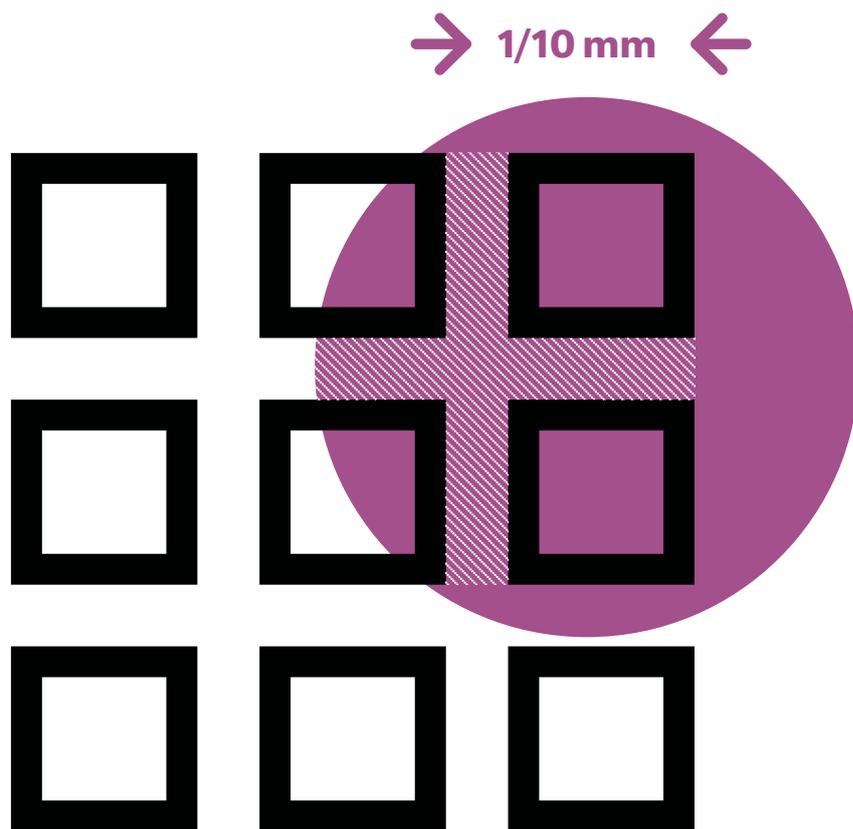

Fugip

Colored cementitious mortar for grouting joints




TECHNICAL FEATURES

Complies with UNI EN 138888 - CG2

Mixing water	~ 1,25 / 1,50 Lt for 5 Kg
Apparent density of fresh mortar	~ 1,90 g/cm ³
Duration of the mix	~ 90 min
Walkability	after 24 h
Commissioning	~ 7 gg
Resistance to temperature	-30°Ca + 90°C
Moisture resistance	optimal
Resistance to aging	optimal
Resistance to oils and solvents	optimal
Resistance to alkali	optimal
Resistance to acids	not optimal for strong acids
Mineralogical nature of the aggregate	silico / carbonate



Laboratory tests performed at + 20 ° C and R.H. 65%, data subject to variations in different atmospheric and installation conditions.



METHOD OF USE

The surface to be grouted must be clean, free from dust and adhesive residues. With very absorbent tiles, moisten the joints with clean water. Pour FUGIP into a container containing clean water (25/30%) using a low-speed mechanical stirrer until the mixture is homogenized. Stir after 2-3 min and apply the mixture evenly with a rubber spatula or squeegee. Immediately remove the excess mortar. When it begins to set, start cleaning using a damp sponge.



WARNINGS

Do not add additives or aggregates of any kind.
Do not apply on inconsistent, dusty or degraded, frozen or wet substrates.
Do not apply at temperatures below + 5 ° C or above + 35 ° C.
Do not apply in conditions of intense sun, high wind or possible rain.
Keep the product in the bags intact, on pallets and in a dry and ventilated place.



PACKAGING

Plastic bags of kg. 5. Color: folder colors.

The above information is to be considered indicative, non-binding and subject to change without notice.
Therefore the suitability of the product for the desired result must be verified by the user, who is fully responsible for its use.