


maltacem

fibro

Premixed cement-based
mortar bedding fiber-reinforced
for interiors and exteriors

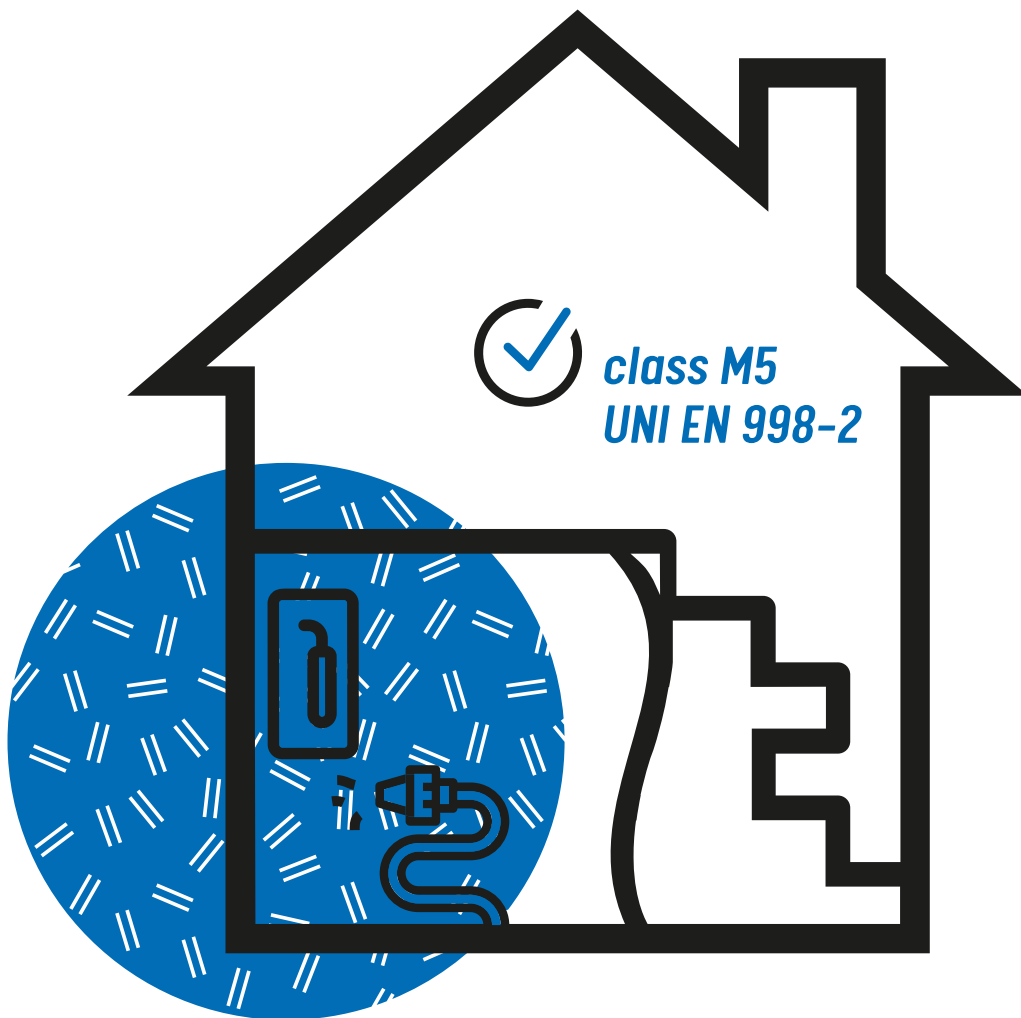

CEMENT-BASED | PLASTER



Maltacem Fibro

Premixed cement-based fiber-reinforced mortar bedding for interiors and exteriors




TECHNICAL FEATURES

Complies with UNI EN 998 - 2 Class M5



Theoretical yield	~ 14 Kg/m ² for 1 cm thick
Apparent specific weight	~ 1340 Kg/m ³
Specific weight applied dry	~ 1700 Kg/m ³
Powder specific weight	~ 1500 Kg/m ³
Granulometry	≤ 3 mm
Mixing water	~ 17%
Reaction to fire	Class A1
Compressive strength	≥ 5 N/mm ²
Flexural strength	≥ 2 N/mm ²

Laboratory tests performed at + 20 ° C and R.H. 65%, data subject to variations in different atmospheric and installation conditions.



MODALITÀ D'IMPIEGO

Premixed mortar to be mixed by hand or with a continuous mixer; simply add clean water (about 17%). Mixing can be carried out either by hand or with a continuous mixer. The use of Maltacem Fibro allows to reduce labor times and the separate supply of traditional constituents, ensuring rapidity and high and constant quality throughout the application period on site.



AVVERTENZE

Do not add additives or aggregates of any kind.
Do not apply on inconsistent, dusty or degraded, frozen or wet substrates.
Do not apply at temperatures below + 5 ° C or above + 35 ° C.
Do not apply in conditions of intense sun, high wind or possible rain.
Keep the product in the bags intact, on pallets and in a dry and ventilated place.



CONFEZIONI

Paper bags of kg. 25.

The above information is to be considered indicative, non-binding and subject to change without notice.
Therefore the suitability of the product for the desired result must be verified by the user, who is fully responsible for its use.