


gipquarz

Premixed quartz dusting for industrial floors

CONTAINS: GROUND QUARTZ AND CEMENT

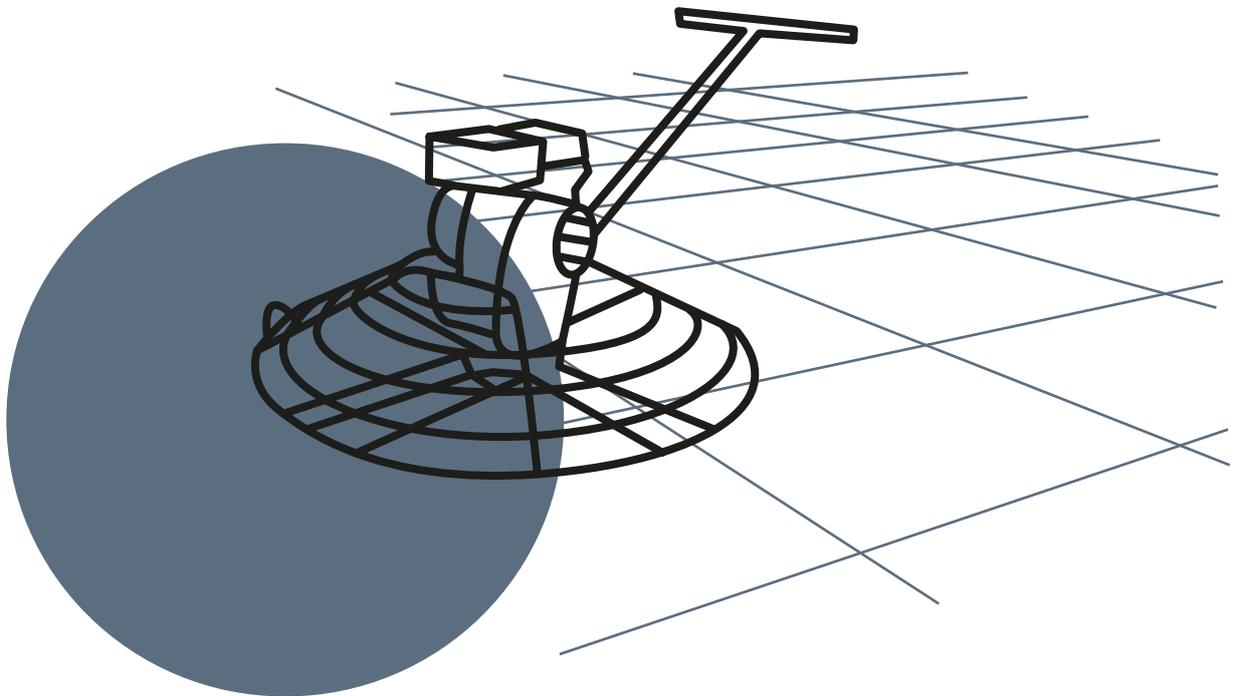


SUBSTRATES



Gipquarz

Premixed quartz dusting for industrial floors


TECHNICAL FEATURES

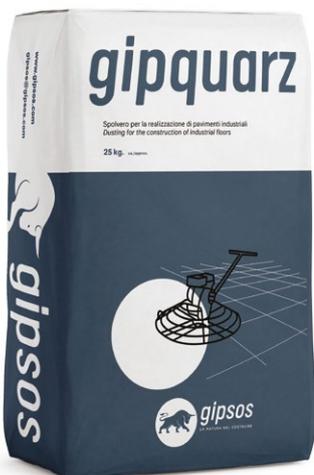

Consumption	~ 3-6 kg/m ² of surface
Granulometry	~ 0-18 mm

Gipquarz is a ready-to-use product, applicable as a surface layer of floors with medium and heavy traffic in concrete for:

- car parks, ramps, garages, cellars;
- industrial floors, sidewalks, sports areas;
- offices, shops.



METHOD OF USE

After scoring the CLS,

on small surfaces: apply GIPQUARZ "fresh on fresh", by hand or by machine, evenly over the entire surface. Wait for the right consistency and total wetting of the product. Compact by hand or with a trowel machine ("helicopter");

on large surfaces: distribute GIPQUARZ just before the passage of the trowel machine ("helicopter").



WARNINGS

Contains powders: use suitable masks, avoid contact with skin and mucous membranes. Do not apply at temperatures below + 5 ° C or above + 35 ° C.

Temperature > +25°C: protect the work for at least 2 days (with waterproof sheets or by spraying water).

Do not apply in conditions of intense sun, high wind or possible rain.

Do not add additives or aggregates of any kind.

Recommended use: professional.

Keep the product in the bags intact, on pallets and in a dry and ventilated place.



CONFEZIONI

Paper bags of 25 kg, on pallets of 60.

The above information is to be considered indicative, non-binding and subject to change without notice.

Therefore the suitability of the product for the desired result must be verified by the user, who is fully responsible for its use.