


gesso *per forma*

Super fine hemihydrate
gypsum for plaster moulds



GYPSUM BASED

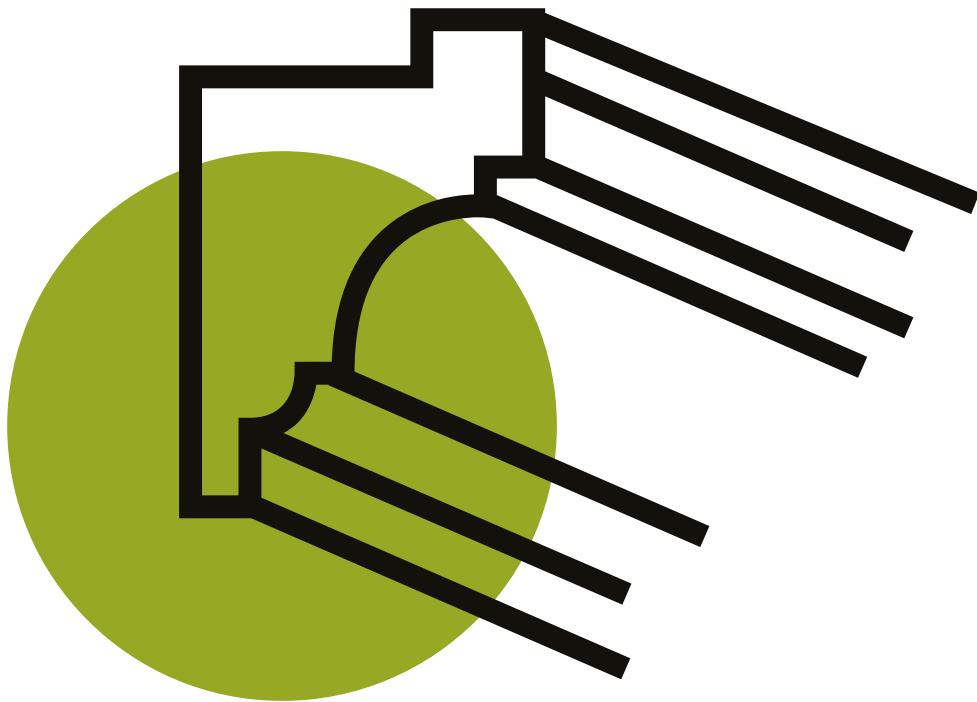

Gesso per forma

Super fine hemihydrate gypsum forplaster moulds



TECHNICAL FEATURES

Category A1/A2/A3



Apparent specific weight	~ 620 Kg/m ³ (free-fall)
Mixing water	72÷75% (~ 18 lt/bags of 25 Kg)
Start taking	~ 10/15 min.
Resistance to fire	A1 class
Compressive strength	≥ 4,5 N/mm ²

Laboratory tests performed at + 20°C and R.H. 65%, data subject to variations in different atmospheric and installation conditions.



METHOD OF USE

The product must be mixed with clean water until obtaining a versatile mix. The percentage of water in the mix is variable. The curing time is approximately 12 to 18 min, depending on the ambient temperature and the temperature of the mix water. The product does not contain additives to retard or accelerate the curing times. The fine casting plaster is not subject to shrinkage after curing and hardening.



WARNINGS

Do not add additives or aggregates of any kind.
Do not apply on inconsistent, dusty or degraded, frozen or wet substrates.
Do not apply at temperatures below + 5 ° C or above + 35 ° C.
Do not apply in conditions of intense sun, high wind or possible rain.
Keep the product in the bags intact, on pallets and in a dry and ventilated place.



PACKAGING

Paper bags of kg. 25.

The above information is to be considered indicative, non-binding and subject to change without notice.
Therefore the suitability of the product for the desired result must be verified by the user, who is fully responsible for its use.