


# precem

# 1000

Premixed cement-based  
foundation plaster for  
interiors and exteriors

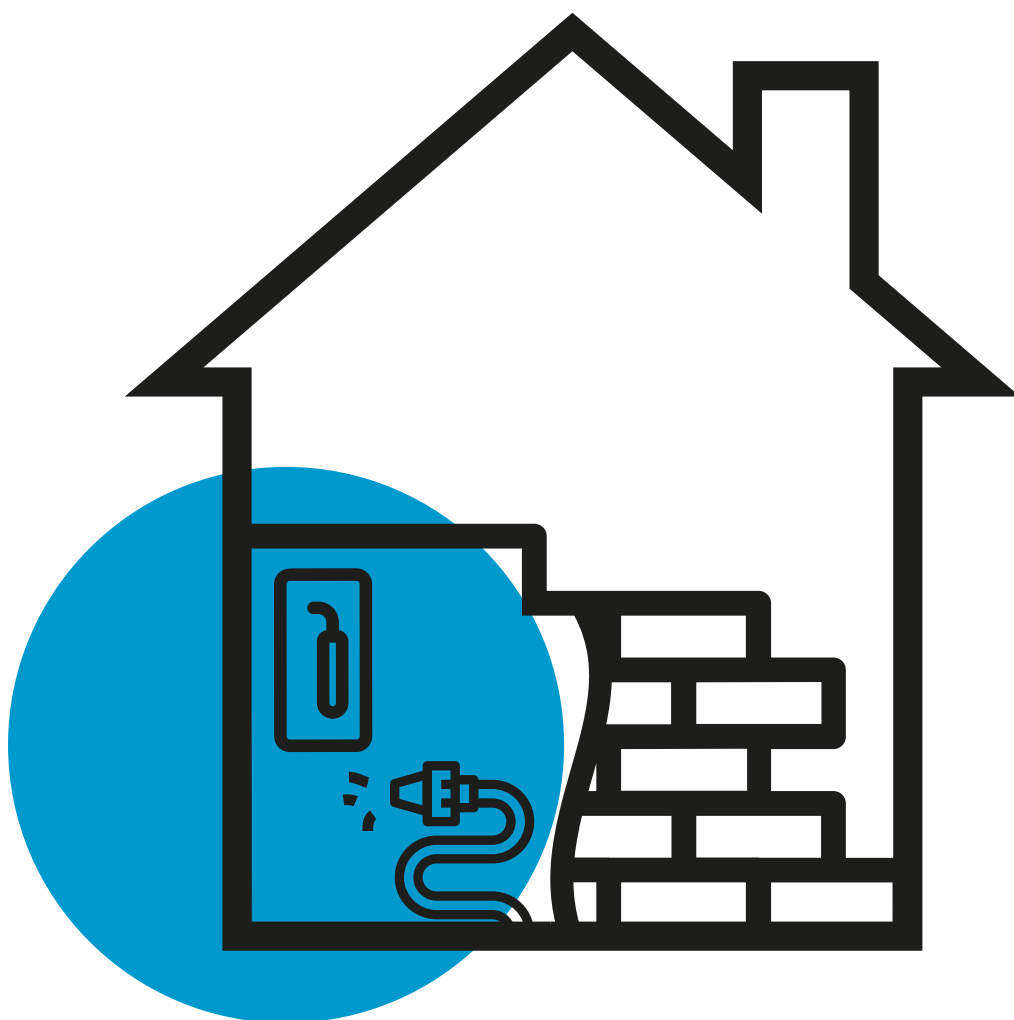

CEMENT-BASED | PLASTERS



# Precem 1000

Premixed cement-based foundation plaster for interiors and exteriors




## TECHNICAL FEATURES

Compliant with UNI EN 998 - 1



<b>Theoretical yield</b>	~ 14 Kg/m <sup>2</sup> for 1 cm thick
<b>Apparent specific weight</b>	~ 1340 ± 5% Kg/m <sup>3</sup>
<b>Specific weight applied dry</b>	~ 1560 ± 5% Kg/m <sup>3</sup>
<b>Granulometria</b>	≤ 1,5 mm
<b>Mixing water</b>	22% (~5,5 lt/bags of 25 Kg)
<b>Start taking</b>	~ 180 min
<b>Mixture life time</b>	~ 120 min
<b>Resistance to fire</b>	A1 class
<b>Compressive strength</b>	≥ 2,0 N/mm <sup>2</sup>
<b>Flexural strength</b>	≥ 1,0 N/mm <sup>2</sup>
<b>Adhesion to the support</b>	≥ 0,2 N/mm <sup>2</sup>

Laboratory tests performed at + 20°C and R.H. 65%, data subject to variations in different atmospheric and installation conditions.



## METHOD OF USE

Prepare the surface and position the beads, anchors and level guides using Precem 1000. Mix the product with clean water only (about 22%) until a lump-free mixture is obtained. Apply in 8-15 mm thick layers; apply greater thicknesses only in successive layers waiting at least 2 hours to cure. The mixed product remains workable for approx. 30 mins on the wall for smoothing and levelling with a straight edge. About 6 hours after laying, the plaster must be roughed by removing the layer of grout; once it has cured, it can be worked with a sponge or a, plastic or metal trowel to then apply Rasocem / Rasocem Plus skim or alternatively mirror finishes. The finished product also lends itself to the finishing of specular cement-based finishes such as the white cement finish (Finitura Bianca Cementizia).



## WARNINGS

- Do not add additives or aggregates of any kind.
- Do not apply on inconsistent, dusty or degraded, frozen or wet substrates.
- Do not apply at temperatures below + 5 ° C or above + 35 ° C.
- Do not apply on wooden or metal substrates not previously treated with Primer Gps.
- Do not apply in conditions of intense sun, high wind or possible rain.
- Keep the product in the bags intact, on pallets and in a dry and ventilated place.



## PACKAGING

Paper bags of kg. 25. Also available in bulk.

The above information is to be considered indicative, non-binding and subject to change without notice. Therefore the suitability of the product for the desired result must be verified by the user, who is fully responsible for its use.