


# *rasoцем* *plus grigio*

Ready mixed render, cement-based,  
fiber reinforced and water-repellent  
for concrete



CEMENT-BASED | RENDER

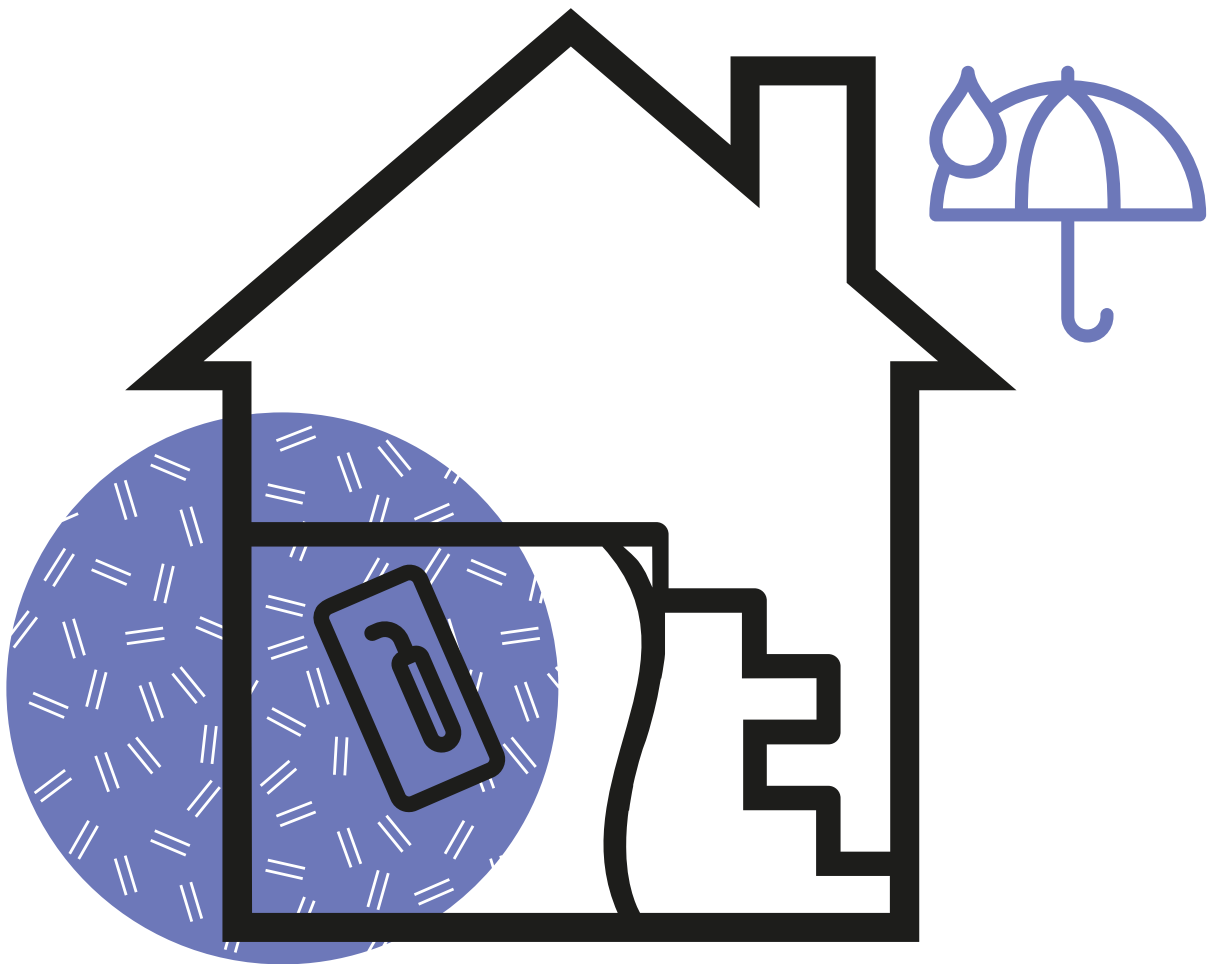

# Rasocem Plus Grigio

Ready mixed render, cement-based, fiber reinforced and water-repellent for concrete




## TECHNICAL FEATURES

Compliant with UNI EN 998 - 1



<b>Theoretical yield</b>	~ 1,4 Kg/m <sup>2</sup> for 1 mm thick
<b>Density mass</b>	~ 1750 Kg/m <sup>3</sup>
<b>Granulometry</b>	≤ 0,7 mm
<b>Mixing water</b>	25%
<b>Water absorption</b>	W1
<b>Mixture life time</b>	~ 120 min.
<b>Reaction to fire</b>	A1 class
<b>Thermal conductivity</b>	λ= 0.47 W/Mk (tab. val. en 1745:2002)
<b>Resistance to compression</b>	≥ 7 N/mm <sup>2</sup>
<b>Flexural strength</b>	≥ 3 N/mm <sup>2</sup>
<b>Adhesion to the support</b>	≥ 0,6 N/mm <sup>2</sup>

Laboratory tests performed at + 20 ° C and R.H. 65%, data subject to variations in different atmospheric and installation conditions.



## METHOD OF USE

Mix and blend the product only with clean water (≈ 24%) to obtain a mixture free of lumps (pasty consistency). Leave the mixture to stand for about 5 minutes and then mix and lay using a steel trowel to a thickness of 1 to 2 mm per coat, on a damp substrate, or wetted if already cured. After about 30 minutes, work the surface with a sponge trowel dampening as required to obtain an even smooth surface, free of joints and bulges.



## WARNINGS

Do not add additives or aggregates of any kind.  
Do not apply on inconsistent, dusty or degraded, frozen or wet substrates.  
Do not apply at temperatures below + 5 ° C or above + 35 ° C.  
Do not apply in conditions of intense sun, high wind or possible rain.  
Keep the product in the bags intact, on pallets and in a dry and ventilated place.



## PACKAGING

Paper bags of kg. 25. Colour: Grey

The above information is to be considered indicative, non-binding and subject to change without notice.  
Therefore the suitability of the product for the desired result must be verified by the user, who is fully responsible for its use.