


giplive!

Self-levelling for screeds



FOUNDATIONS

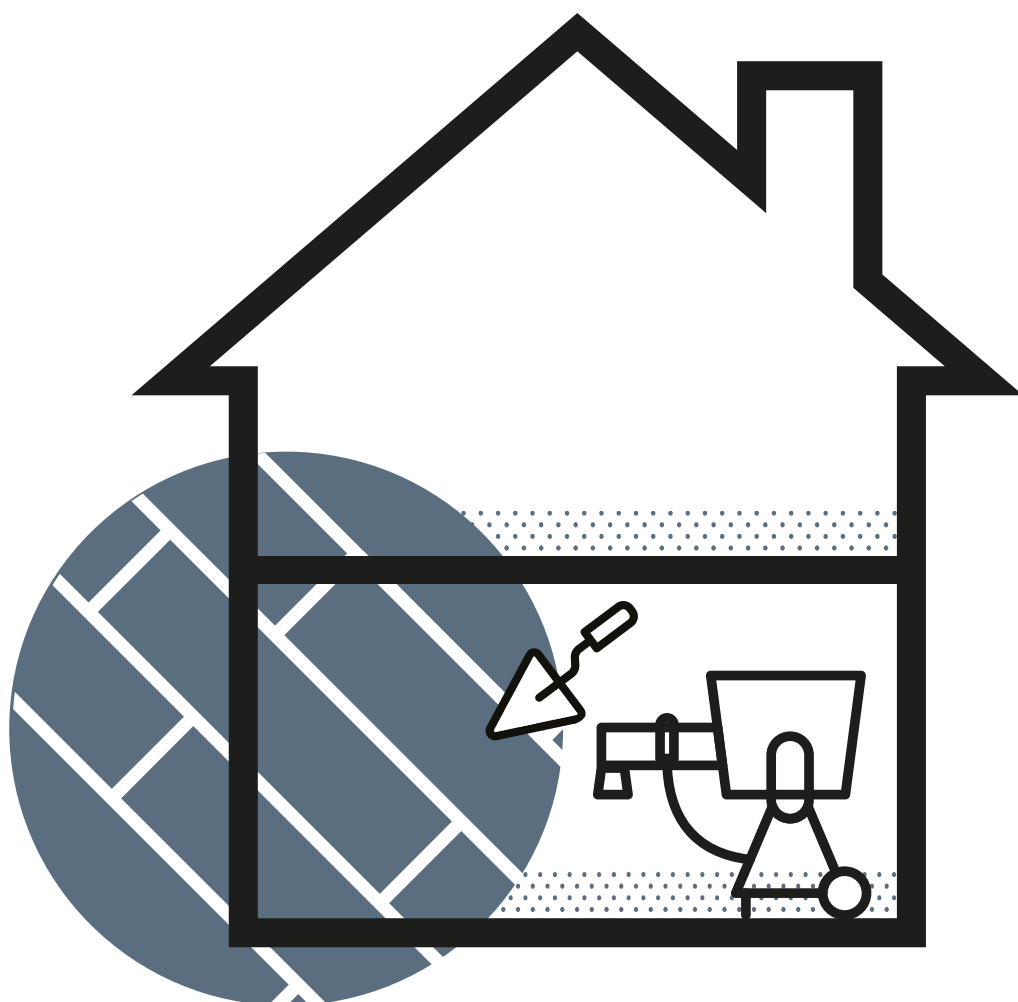

Giplivel


Self-levelling for screeds

TECHNICAL FEATURES



Expected yield	~ 1,3 Kg/m ² for 1 mm thick
Apparent specific weight	~ 1350 Kg/m ³
Granulometry	≤ 0,5 mm
Mixing water	25%
Reaction to fire	A1 Class
Thickness applied	2÷10 mm
Laying time	≥ 7 days

Laboratory tests performed at + 20 ° C and R.H. 65%, data subject to variations in different atmospheric and installation conditions.



METHOD OF USE

Knead in clean water (~25%), with a mixer with a low number of turns, until you get a homogeneous fluid dough without lumps. Let the dough rest for ~5 minutes, then spread it on the support by spreading it with a metal spatula in two or more successive passes to be performed in the same day and with a total thickness of 10mm. Facilitate the dispersion of air bubbles with a passage of bubble fringe roller. Application thickness from 1 to 5 mm.



WARNINGS

The chromatic aspect may vary according to the absorption of the support and the climatic conditions.

Do not apply on inconsistent, dusty or degraded, frozen or wet substrates.

Do not apply at temperatures below + 5 ° C or above + 35 ° C.

Do not apply in conditions of intense sun, high wind or possible rain.

Keep the product in the bags intact, on pallets and in a dry and ventilated place.



PACKAGING

Paper bags of kg. 25.

The above information is to be considered indicative, non-binding and subject to change without notice.

Therefore the suitability of the product for the desired result must be verified by the user, who is fully responsible for its use.