


rasofin

Low thickness
gypsum-based render
for interior use

plus



35

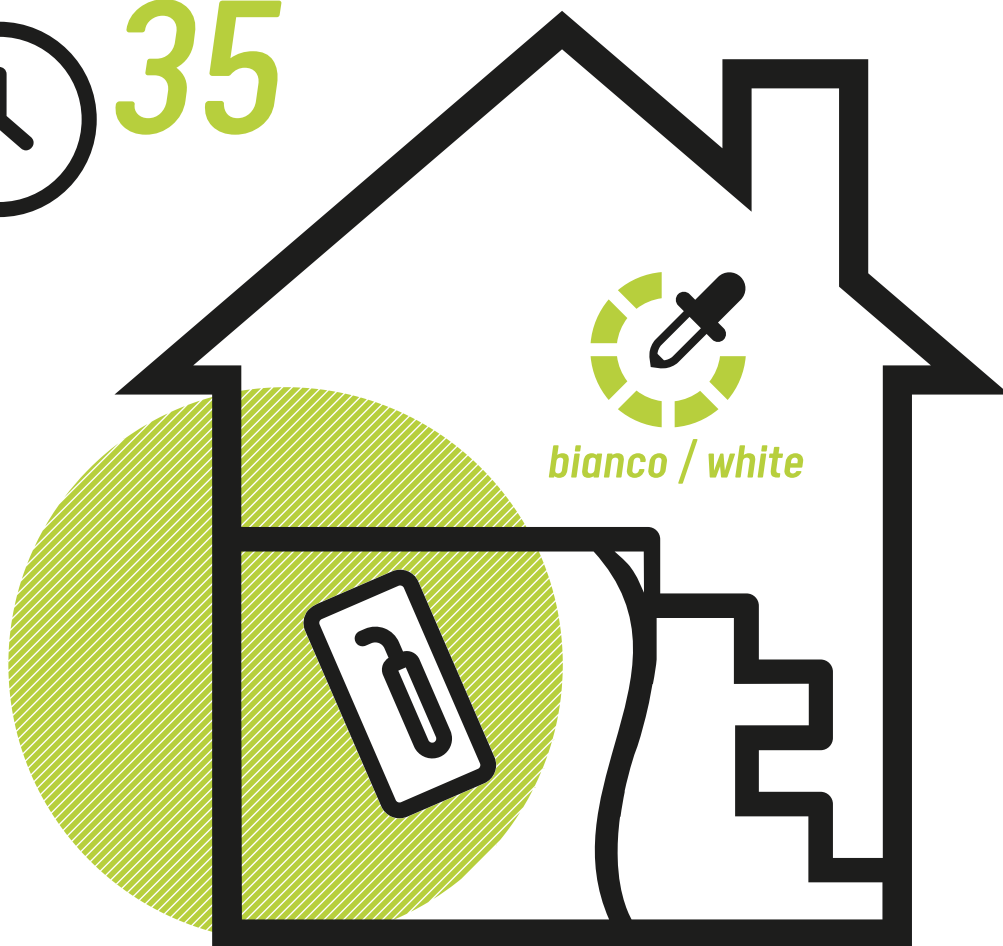

bianco / white

GYPSUM-BASED | RENDERS



gipsos
LA NATURA NEL COSTRUIRE

Rasofin Plus 35

Low thickness gypsum-based render for interior use



TECHNICAL FEATURES

Compliant with UNI EN 13279 - C6/20/2 class 1



Theoretical yield	~ 1 Kg/m ² for 1 mm thick
Residue at 100 µm	< 0,5 %
Setting Time	~ 60 min.
Resistance to fire	A1 class
Compressive strength	5 N/mm ²
Flexural strength	2 N/mm ²

Laboratory tests performed at + 20°C and R.H. 65%, data subject to variations in different atmospheric and installation conditions.



METHOD OF USE

Gradually pour the powder product into a container with clean water, applying a water/gypsum mixture ratio of 100/180. Mix with a trowel or slow drill to obtain a smooth mixture free of lumps and taking care only to mix the amount of product required for use within 100-120 minutes from mixing. Apply the product to the wall using a wide plastering spatula, taking care to spread it evenly and level off any roughness. The product can be applied from a minimum thickness of 1 mm to a maximum of 4 mm for each application. If applying a second coat, wait from 30 to 60 minutes (depending on the thickness of the first coat and ambient temperature and humidity).



AVVERTENZE

Do not add additives or aggregates of any kind.
Do not apply on inconsistent, dusty or degraded, frozen or wet substrates.
Do not apply at temperatures below + 5 ° C or above + 35 ° C.
Do not apply in conditions of intense sun, high wind or possible rain.
Keep the product in the bags intact, on pallets and in a dry and ventilated place.



PACKAGING

Paper bags of kg. 25.

The above information is to be considered indicative, non-binding and subject to change without notice.
Therefore the suitability of the product for the desired result must be verified by the user, who is fully responsible for its use.